


## Wire Guides and Straightning Rollers - type A or AT

d 5~15mm

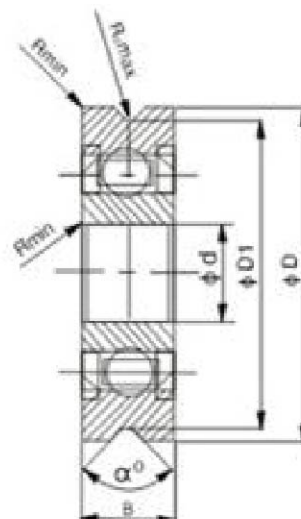

Part No.	Dimensions (mm)							Load Ratings		Weight
	d	D	D1	B	Ra	$\alpha$	R	Cw (KN)	Cow(KN)	≈(g)
A507 ZZ	5	21	19	6	0.5	90	0.3	2.2	0.89	11
A507 2RS	5	21	19	6	0.5	90	0.3	2.2	0.89	11
A603 ZZ	6	21	19	6	0.5	90	0.3	2.2	0.89	11
A603 2RS	6	21	19	6	0.5	90	0.3	2.2	0.89	11
A806 ZZ	8	26	23	7	0.5	90	0.3	3.3	1.37	19
A806 2RS	8	26	23	7	0.5	90	0.3	3.3	1.37	19
A1001 ZZ	10	30	27	8	0.5	90	0.3	4.55	1.97	31
A1001 2RS	10	30	27	8	0.5	90	0.3	4.55	1.97	31
A1002 ZZ	10	35	31	9	0.5	90	0.6	6	2.68	46
A1002 2RS	10	35	31	9	0.5	90	0.6	6	2.68	46
A1500 ZZ	15	47	41	11	0.5	90	0.6	7.6	3.7	104
A1500 2RS	15	47	41	11	0.5	90	0.6	7.6	3.7	104