

Chain Sprocket Standard: DIN;ASA;ANSI;JIS;KANA or Chain Sprocket Made to Order;



Induction Heating Chain Sprocket

Chain Sprocket Processing Technic: Forged Forming

Chain Sprocket Application:Using In All Transmission Equipment Together With Roller Chain

1. Heat treatment: Harden teeth, tempering, queching
- 2.Surface treatment: zinc plated, blacken, phopharization, carborized
3. Process: Forging(casting)---lathe- teeth shaping---finishing---oil washing---Packing ,
4. Inspection: All items are checked and tested thoroughly during every working procedure and after the product is finally manufactured to ensure that the best quality product enter into the market.
5. Durable, bad condition Resistance

Sprockets: 25 Sprockets

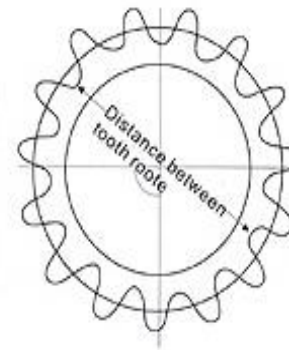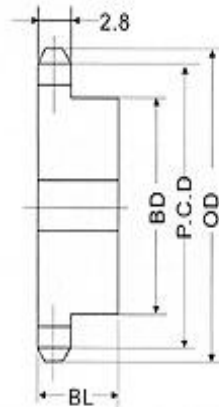

Motion(shanghai)Industrial Development Co.,Ltd

NO.OF TEETH	OUTSIDE DIAM.	PITCH DIAM.	BOTTOM OR CALIPER DIAM.	STOCK BORE	TYPE"B" SINGLE STRAND				WT. KG	MATERIA L
	OD	P.C.D			HUB DIAM.BD	HUB LENGTH BL THRU BORE	BORE Min.	BORE Max.		
10	23	20.55	17.25	6.5	14	15	8	8.5	0.03	-
11	25	22.54	19.01	6.5	15	15	8	8.5	0.03	S45C
12	28	24.53	21.23	7.5	15	15	8	9.5	0.03	-
13	30	26.53	23.04	7.5	18	15	9.5	10	0.05	-
14	32	28.54	25.24	7.5	20	15	9.5	10	0.05	-
15	34	30.54	27.07	7.5	20	15	9.5	10	0.05	-
16	36	32.55	29.25	9.5	25	15	11.5	12	0.06	-
17	38	34.56	31.11	9.5	25	15	11.5	12	0.07	-
18	40	36.57	33.27	9.5	25	15	11.5	12	0.07	-
19	42	38.58	35.15	9.5	28	15	11.5	16	0.08	-
20	44	40.59	37.29	9.5	28	15	11.5	16	0.08	-
21	46	42.61	39.19	9.5	28	15	11.5	16	0.09	-
22	48	44.62	41.32	9.5	30	15	11.5	16	0.1	-
23	50	46.63	43.23	9.5	30	15	11.5	16	0.11	-
24	52	48.65	45.35	9.5	30	15	11.5	16	0.12	-
25	54	50.66	47.27	9.5	35	15	11.5	20	0.14	-
26	56	52.68	49.38	9.5	35	15	11.5	20	0.14	-
27	58	54.7	51.3	9.5	35	15	11.5	20	0.15	-
28	60	56.71	53.41	9.5	35	15	11.5	20	0.15	-
29	62	58.73	55.35	9.5	35	15	11.5	20	0.16	-
30	64	60.75	57.45	9.5	35	15	11.5	20	0.16	-
31	66	62.77	59.39	10.5	40	20	12.5	22	0.2	-
32	68	64.78	61.48	10.5	40	20	12.5	22	0.2	-
33	70	66.8	63.43	10.5	40	20	12.5	22	0.2	-
34	72	68.82	65.52	10.5	40	20	12.5	22	0.21	-
35	74	70.84	67.47	10.5	40	20	12.5	22	0.21	-

36	76	72.86	69.56	10.5	40	20	12.5	22	0.22	-
37	78	74.88	71.51	10.5	40	20	12.5	22	0.26	-
38	80	76.9	73.6	10.5	40	20	12.5	22	0.26	-
39	82	78.91	75.55	10.5	40	20	12.5	22	0.27	-
40	84	80.93	77.63	10.5	40	20	12.5	22	0.27	-
41	87	82.95	79.59	10.5	50	20	12.5	30	0.32	-

www.motnbearing.com