


Chain Sprocket Standard: DIN;ASA;ANSI;JIS;KANA or Chain Sprocket Made to Order;
 Induction Heating Chain Sprocket
 Chain Sprocket Processing Technic: Forged Forming
 Chain Sprocket Application:Using In All Transmission Equipment Together With Roller Chain
 1. Heat treatment: Harden teeth, tempering, queching
 2.Surface treatment: zinc plated, blacken, phopharization, carburized
 3. Process: Forging(casting)---lathe- teeth shaping---finishing---oil washing---Packing ,
 4. Inspection: All items are checked and tested thoroughly during every working procedure and after the product is finally manufactured to ensure that the best quality product enter into the market.
 5. Durable, bad condition Resistance

Sprockets: 120 Sprockets

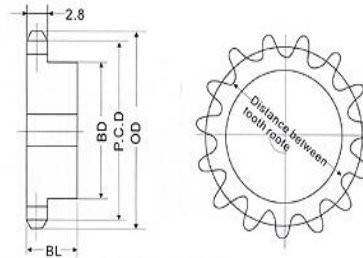

Motion(shanghai)Industrial Development Co.,Ltd

NO.OF TEETH	OUTSIDE DIAM.	PITCH DIAM.	BOTTOM OR CALIPER DIAM.	STOCK BORE	TYPE"B" SINGLE STRAND				WT. KG	MATERIAL	TYPE"A"		TYPE"B" DOUBLE STRAND				WT. KG	MATERIAL	
					HUB DIAM.BD	HUB LENGTH BL THRU	BORE Min.	BORE Max.			STOCK	WT. KG	MATERIA L	HUB DIAM.BD	HUB LENGTH BL THRU	BORE Min.			BORE Max.
9	127	111.4	87.47	20	70	56	22	46	2.7	S45C	-	-	SS41	-	-	-	-	-	S45C
10	140	123.29	101.06	20	78	56	22	51	3.2	-	22	2.16	-	80	-	28	55	8	-
11	153	135.24	111.63	20	91	56	22	60	4	-	22	2.6	-	90	100	28	60	8.7	-
12	165	147.21	124.98	20	98	56	22	66	4.8	-	22	3.1	-	100	100	30	66	9.2	-
13	177	159.2	135.81	20	98	56	22	66	5.3	-	22	3.6	-	115	100	30	75	10.9	-
14	190	171.22	148.99	20	107	56	22	75	6.3	-	22	4.2	-	120	100	30	80	11.4	SS41 (WELD ING WAY) S35C
15	202	183.25	160.02	20	117	63	22	80	7.8	-	22	4.8	-	120	100	40	80	13.2	-
16	214	195.29	173.06	20	117	63	22	80	8.4	-	22	5.5	-	140	100	40	95	16.5	-

17	217	207.35	184.23	20	117	63	22	80	9.1	-	22	6.2	-	140	100	40	95	19	-
18	239	219.41	197.18	20	117	63	22	80	9.9	-	22	6.95	-	150	100	40	103	21	-
19	251	231.48	208.46	20	117	63	22	80	10.7	-	22	7.7	-	150	100	40	103	23	-
20	263	243.55	221.32	20	127	63	22	89	12.1	-	22	8.55	-	150	100	40	103	26	-
21	276	255.63	232.69	20	127	63	22	89	13	-	22	9.4	-	150	100	40	103	28	-
22	288	267.72	245.49	26	127	63	28	89	13.4	SS41B TYPE (WELD ING)	28	10.3	-	147	100	40	103	30	-
23	300	279.8	256.92	26	127	63	28	89	14.5	-	28	11.3	-	147	100	40	103	33	-
24	312	291.9	269.67	26	127	63	28	89	15.2	-	28	12.3	-	157	100	40	110	31	-
25	324	303.99	281.16	26	127	63	28	89	16.2	-	28	13.3	-	157	100	40	110	33	-
26	337	316.09	293.86	26	127	63	28	89	17.2	-	28	14.4	-	157	100	40	110	35	-
27	349	328.19	305.4	26	-	-	-	-	-	-	28	15.5	-	-	-	-	-	-	-
28	361	340.29	318.06	26	137	71	28	95	20.9	-	28	16.7	-	157	100	40	110	39	-
29	373	352.39	329.64	26	-	-	-	-	-	-	28	17.8	-	-	-	-	-	-	-
30	385	364.5	342.27	26	137	71	28	95	23.2	-	28	19.2	-	157	100	40	110	43.9	-
31	398	376.6	353.89	26	-	-	-	-	-	-	28	20.4	-	-	-	-	-	-	-
32	410	388.71	366.48	26	137	71	28	95	25.7	-	28	21.8	-	157	100	40	110	47	-
33	422	400.82	378.13	26	137	71	28	95	28.4	-	28	23.2	-	-	-	-	-	-	-
34	434	412.93	390.7	26	-	-	-	-	-	-	28	24.6	-	-	-	-	-	-	-
35	446	425.04	402.38	26	137	71	28	95	29.7	-	28	26.1	-	157	100	40	110	56.8	-
36	458	437.15	414.92	26	137	71	28	95	32	-	28	27.6	-	157	100	40	110	60	-
38	483	461.38	439.15	26	137	71	28	95	35	-	28	30.8	-	157	100	40	110	67	-
40	507	485.6	463.37	26	147	80	28	103	38.2	-	28	34.1	-	177	140	45	125	84.3	-
42	531	509.84	487.61	26	147	80	28	103	42	-	28	37.6	-	177	140	45	125	87	-
44	556	534.07	511.84	26	-	-	-	-	-	-	28	41.2	-	-	-	-	-	-	-
45	568	546.19	523.62	26	147	80	28	103	47.6	-	28	43.1	-	177	140	45	125	98.5	-
46	580	558.3	536.07	26	-	-	-	-	-	-	28	45.1	-	-	-	-	-	-	-
48	604	582.54	560.31	26	147	80	28	103	53	-	28	49	-	177	140	45	125	104	-
50	628	606.78	584.55	26	147	80	28	103	58	-	28	53.3	-	177	140	45	125	115	-
54	677	655.26	633.03	26	147	100	28	103	65.2	-	28	62.1	-	177	140	45	125	121	-
60	750	727.99	705.76	26	167	100	28	103	78	-	28	76.7	-	177	160	45	125	132	-
63	786	764.35	742.12	26	-	-	-	-	-	-	28	84.5	-	-	-	-	-	-	-
70	871	849.22	826.99	26	-	-	-	-	-	-	28	104.3	-	-	-	-	-	-	-
75	932	909.84	887.41	26	-	-	-	-	-	-	28	119.8	-	-	-	-	-	-	-
80	993	970.46	948.23	26	-	-	-	-	-	-	28	136.3	-	-	-	-	-	-	-