

Specifications


1. Thrust angular contact ball type
  2. High precision and low noise
  3. Long life and low noise
- Other Code:

Character and Quality

- The rings and balls made of high quality chrome Steel SAE52100
- The Grinding of Raceway is very carefully to guarantee smooth running and reduce noise
- Long Service Life
- The cage is available with steel or nylon

Application: SUZUKI

Steering Bearing

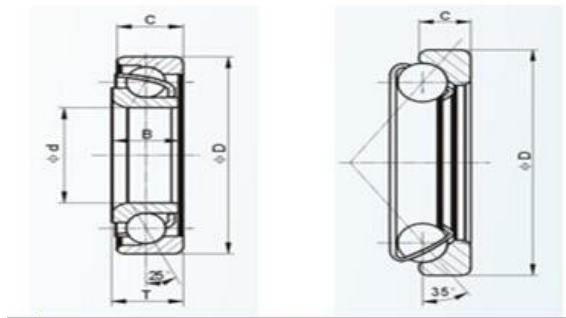

Motion(shanghai)Industrial Development Co.,Ltd

| Bearing No. | Dimension(mm) |       |      |      | Weight |
|-------------|---------------|-------|------|------|--------|
|             | d             | D     | B    | C    | Kg     |
| 15BCS02     | 15            | 35    |      | 11   | 0.045  |
| 15BSW02     | 15            | 35    | 7.5  | 7.5  | 0.035  |
| 17BSW02     | 17            | 42    |      | 13   | 0.08   |
| 20BSW01     | 20            | 52    |      | 14   | 0.1    |
| 7304A1      | 20            | 52    | 15   | 15   | 0.15   |
| 9943        | 30            | 62    | 17.2 | 17.2 | 0.21   |
| ASB3055     | 30            | 55.56 | 12.7 | 12.7 | 0.16   |
| AG2565      | 16.07         | 53.08 | 19.5 | 17.1 | 0.25   |
| BT19Z-1     | 19.05         | 47    |      | 13   | 0.12   |
| VBT17Z-3    |               | 41    |      | 11   | 0.1    |
| VBT20Z-1    |               | 44    |      | 13.5 | 0.11   |
| 27H3946     |               | 55    |      | 10   | 0.15   |

www.motnbearing.com