

Specifications:

agricultural machinery bearing
bushing low price high quality bush



Feature:

- 1.Periodical lubrication is necessary.
- 2.Excellent wear resistance and low coefficient of friction.
- 3.Excellent mechanical strength and dimensional stability.
- 4.Good thermal conductivity.

Application:

- 1.water conservancy industries
- 2.Automotive industries
- 3.Agricultural machinery and rolling mills
- 4.Balance shaft sleeve
- 5.Car crane
- 6.Hydraulic cylinders

Agricultural ball bearing: ST Series

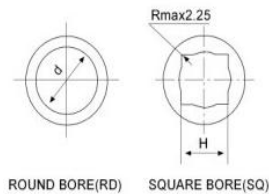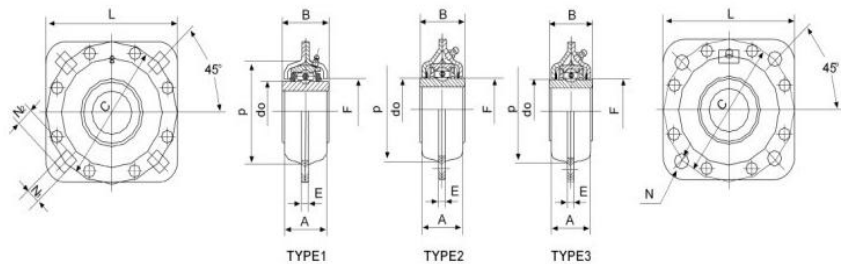

The disk harrow unit is available in two basic size groups. one incorporating a 209 and one a 211 bearing, both size groups offer these outstanding features.

- ※ Dynamic alignment capability(±3°).
- ※ Shroud effect from close clearance of stamping to inner ring.
- ※ Relubrication
- ※ One unit piece for ease of handling and assembly.
- ※ Fitting flange mates with outer ring milled recess, preventing possibility of outer ring circumferential movement.

Motion(shanghai)Industrial Development Co.,Ltd

Bearing No.	Type	Bearing Bore		Dimensions (mm)									Basic load ratings	
		H (SQ)	d (RD)	L	P	B	A	F	do	E	c	N	Dynarmi	Static
ST491A	1	-	45	127	98	42.8	42	60	57.55	7	127	13.5	31850	17500
ST491A-I	2	-	45	127	98	42.8	37	60	57.55	7	127	13.5	31850	17500
ST491A-II	3	-	45	127	98	42.8	37	60	57.55	7	127	13.5	31850	17500
DHU45R-209	1	-	45	127	98	42.8	42	60	57.55	7	127	13.5X16.7	31850	17500
ST491B	1	-	38.86	127	98	42.8	42	60	57.55	7	127	13.5	31850	17500
ST491B-I	2	-	38.86	127	98	42.8	37	60	57.55	7	127	13.5X16.7	31850	17500
ST491B-II	3	-	38.86	127	98	42.8	37	60	57.55	7	127	13.5X16.7	31850	17500
ST209-1 1/8	1	29.927	--	127	98	42.8	42	60	57.55	7	127	13.5X16.7	31850	17500
ST209-1 1/8-1	2	29.927	-	127	98	42.8	37	60	57.55	7	127	13.5X16.7	31850	17500
ST209-1 1/8-11	3	29.927	-	127	98	42.8	37	60	57.55	7	127	13.5X16.7	31850	17500
ST211-1 3/4	1	-	55.575	139.7	113.5	55.5	46.4	73	69	9	139.7	13.5	43550	25000
ST211-2 3/16	1	-	55.575	139.7	113.5	55.5	46.4	73	69	9	139.7	13.5	43550	25000
ST211-2 3/16-1	2	-	55.575	139.7	113.5	55.5	42	71	69	8	139.7	13.5	43550	25000
DHU40S-211	1	40.878	-	139.7	113.5	51	46.4	73	69	9	139.7	13.5X15.1	43550	25000
FD211-1 1/2	2	38.89	-	139.7	113.5	51	42	71	69	8	139.7	13.5X15.1	43550	25000
DHU55R-211	1	-	55	139.7	113.5	51	46.4	73	69	9	139.7	13.5X15.1	43550	25000
DHU55R-211-I	2	-	55	139.7	113.5	51	42	71	69	8	139.7	13.5X15.1	43550	25000

ST211-1 3/4	1	-	45.212	139.7	113.5	55.5	46.4	73	69	9	139.7	13.5	43550	25000
ST211-2 3/16	1	-	45.212	139.7	113.5	55.5	46.4	73	69	9	139.7	13.5	43550	25000
ST211-2 3/16-1	2	-	45.212	139.7	113.5	55.5	42	71	69	8	139.7	13.5	43550	25000

www.motnbearing.com