


## Wire Guides and Straightening Rollers SS Series

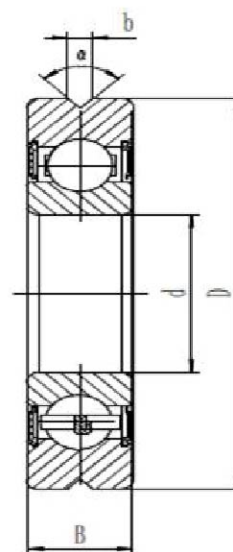

Part No	ØD	ød	B	b	a	Wire Φ
SS7	7	3	3	0.5	90	-0.2
SS10	10	3	4	0.6	90	-0.4
SS13	13	4	5	0.8	90	0.2-0.6
SS16	16	4	5	1.0	90	0.5-0.9
SS17	17	4	5	1.5	90	0.5-1.3
SS19	19	6	6	2.0	90	0.7-1.5
SS21	21	6	6	2.4	90	0.7-2.0
SS22	22	8	7	1.7	90	0.8-1.6
SS23	23	8	7	1.7	90	0.8-1.6
SS26	26	8	7	3.3	90	0.8-3.0
SS30	30	10	8	3.3	90	0.8-3.2
SS32	32	10	9	4.4	90	1.2-4.3
SS35	35	12	10	4.7	90	1.9-4.6
SS40	40	15	11	5.2	90	3.0-5.0
SS47	47	17	12	7.3	90	4.0-7.2
SS52	52	20	14	8.5	100	6.0-8.4
SS62	62	25	15	10.1	100	6.5-10.0
SS72	72	30	16	11.1	100	7.0-11.0
SS80	80	35	17	15.1	100	7.5-15.0